


BLANCO




CRUDO



GRIS CLARO



TOPO



VAINILLA



CANELA



GRIS OSCURO




NEGRO



LINO



SILVER



MUESTRA DE CALIDAD / QUALITY SAMPLE




AZUL ROYAL



NAVY



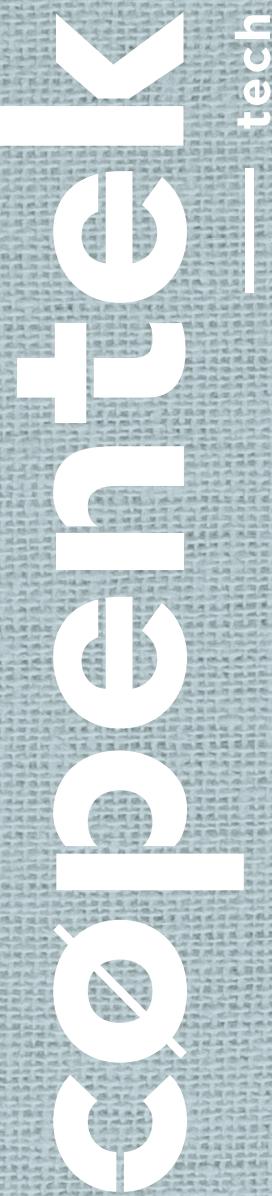

tech PVC

Lona especial para toldo con laminado PVC alta resistencia a los rayos UV. 100% hidrófugo. Especial para pergolas y estructuras de gran tamaño.

Fabric for awning with PVC laminate finishing high-resistance to UV light. 100% waterproof. Special made for large-size structures and pergolas.



Tejido de exterior, tapicería y toldo
Outdoor furniture & sunshades fabrics

cøpentek

— tech —

Cøpentek Tech by Dralon® tarps are made from bulk-dyed acrylic fibre with a PVC-coated face, which makes them absolutely waterproof. The PVC coating adheres perfectly to the fabric, preventing it from cracking or laminating.

The PVC-free face is treated to achieve good water- and oil-repellency thanks to our special HQ anti-staining and water-proofing treatment, while the PVC-coated face exposed to the sun confers high resistance to light, UV rays, and colour alteration, giving it higher resistance than other similar fabrics.

Cøpentek Tech by Dralon® are treated with anti-microbial products that offer optimal protection.

SUN PROTECTION*

Cøpentek Tech by Dralon® tarps protect from ultraviolet radiation with high filtration percentages. Depending on the density, thickness, and colour, the percentage of protection may vary.

Ultraviolet Protection Factor (UPF) of up to 80+ according to UV Standard 801.

MAINTENANCE*

To prevent the accumulation of dirt in the fabric that may harm the finish and accelerate deterioration, it is recommended that you wash the tarp periodically with abundant water and leave it to air dry. Do not use detergents or products with ammonia or solvents.

FINISH*

PVC film on one face. Special HQ waterproof anti stain and anti mildew.

GUARANTEE*

Cøpentek guarantees Tech by Dralon® tarps for 5 years from the installation date.

*See attached conditions.

Mantenimiento Fácil / Easy Care

Hilo / Yarn	100% Fibra acrílica 100% Dralon® 100% Acrylic Fibre 100% Dralon®	Repelencia al aceite / Oil Repellency	≥5
Urdimbre / Warp Trama / Weave	31 hilos x cm Nm 2 / 40.000 11 pasadas x cm Nm 2 / 40.000	Repelencia al agua / Water Repellency	≥5
Acabado / Finish	Lámina PVC Especial HQ Anti bacterias / Anti manchas / Anti moho PVC film Special HQ Anti bacteria / Anti stain / Anti mildew	Resistencia a la tracción y alargamiento a la rotura	Longitudinal / Lengthwise Fuerza Máx (N) / Max average load (N) Alargamiento a la fuerza máx (%) / Average elongation (%) 1600 28'5 %
Ancho / Width	120 cm / 59" ± 1%	Determination of breaking strength and elongation	Transversal / Crosswise 580 19,5 %
Largo Pieza / Length of roll	60 m / 65,64 yds		
Peso / Weight m ²	400 g / m ² ± 5% *UNE 53352	Solidad del color a la luz / Colour Fastness to light	Grado / Grade 7/8 - 8 Escala Azules / Blue scale Grado / Grade 4/5 - 5 Escala Grises / Grey scale *UNE EN ISO 105 B02
Columna hidrófuga / Waterproof column	100% impermeable / waterproof *UNE EN ISO 20811	Solidad del color al agua clorada / Color fastness to chlorinated water	5 sobre 5 *UNE EN ISO 105 E03
		Solidad del color al agua de mar / Color fastness to sea water	5 sobre 5 *UNE EN ISO 105 E02



*UNE EN ISO 13934-1:2013

Grado / Grade
7/8 - 8 Escala Azules / Blue scale
Grado / Grade
4/5 - 5 Escala Grises / Grey scale
*UNE EN ISO 105 B02

*UNE EN ISO 105 E03

*UNE EN ISO 105 E02

cøpente

COPEN FABRICS, SL
NIF: B53475711
Pol. Ind. Els Dos Pinos, 03410 Biar, Alicante
T. 965 81 12 05 / info@copentek.com
www.copentek.com



Fabricado en España
Made in Spain

